

# WHISTLE CONTROL SYSTEM




## Time Control STM series

STM series time controller gives the fog signal automatically according to the International Regulations for Preventing Collisions at Sea 1972 (COLREGS) Rule 35.

Variants contacts and in / output are available as the general emergency alarm signal, the terminal for external contacts and other interface on request. The standard configuration is shown below. The time controller is generally installed in the bridge console. It is available the control switch such as auto fog signal, whistle free blow, heater and maneuvering light. Push button switch and Morse key are installed on both wings and bridge for manual operation to response to the abnormal situations. Time controller is immune against electrical noise.

Variants models are available for power supply voltage, flush mount, wall mount and console mount for specific needs.

## WHISTLE CONTROL SYSTEM

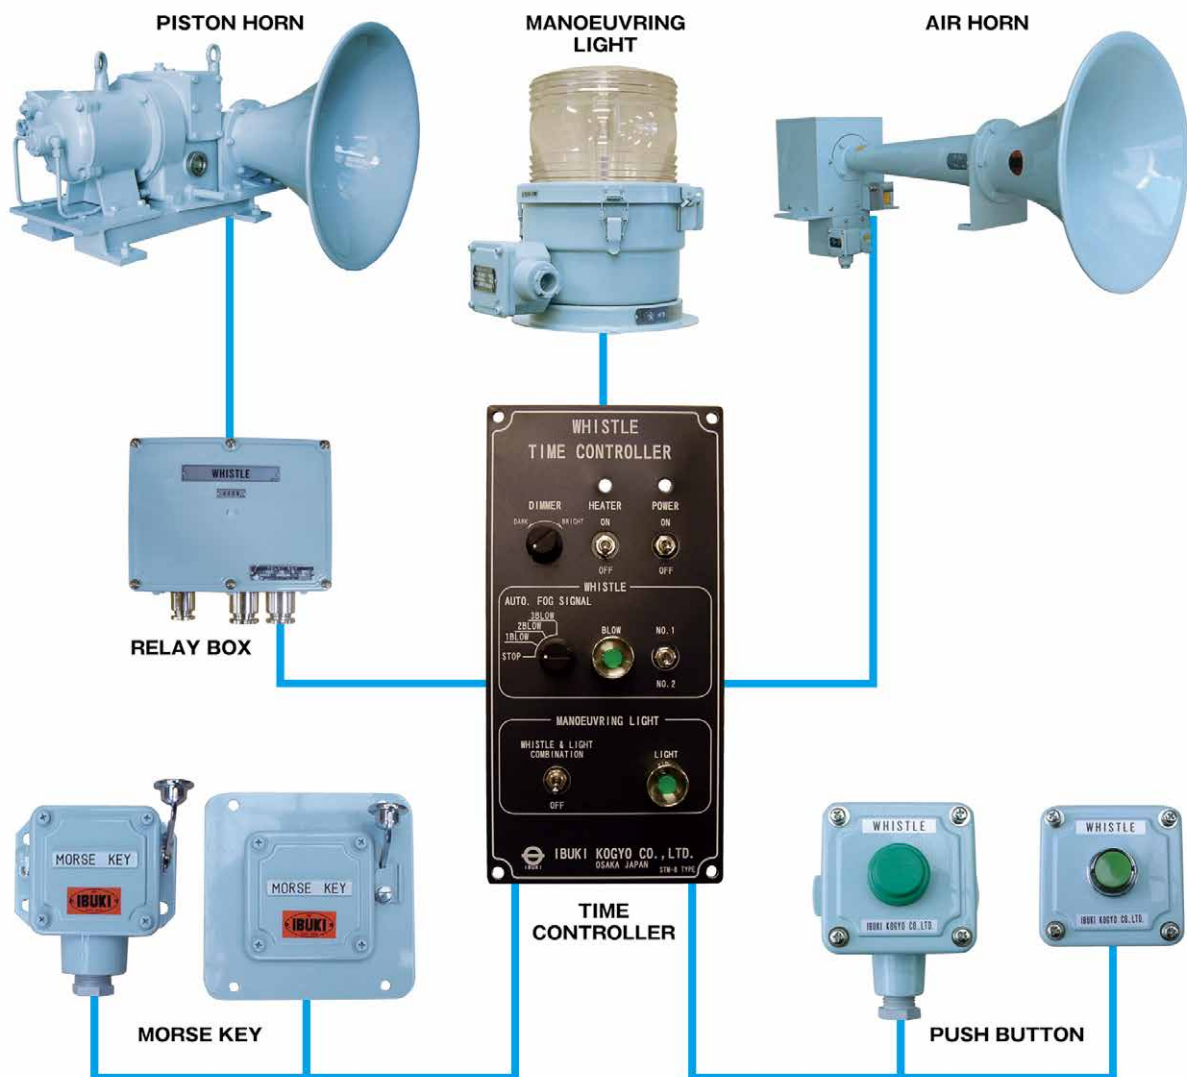

Whistle

Item	Type	Model	Protection Degree	Rated Voltage	Weight (kg)	Code No.
Time controller	installed in the bridge console	STM-8F	IP20	DC24V AC100/220V	2.0	A08010037
Morse key	Wall mounting	EAA-4102	IP56	250V 3A	1.0	A13030001
Morse key	Flush mounting	EAA-4103	IP20	250V 3A	1.1	A13030002
Push button	Wall mounting	EAA-3988	IP56	250V 6A	0.5	A08010044
Push button	Flush mounting	EAA-3929	IP20	250V 6A	1.2	A08010039
maneuvering light	—	ML	IP56	AC100/220V 100Wx1	4.3	A13090001