

XENON LAMP TYPE REMOTE CONTROL SEARCHLIGHT

- Available to mount monitoring camera system

In recent years, Natural disasters such as hurricane, earthquake, and tsunami are much increased, and many precious lives were sacrificed.

When the disasters are happened at the present day, It's damage condition is getting larger and larger than before. Therefore, Security control and watching become more important on day by day.

Lighting are carried out very big duty at disasters during the night. We "Sanshin" can supply the total system of security and watching purpose by package including custom made search lights.

- Direct the super spot beam by xenon lamp.
- Direct the building or bridge more naturally by beautiful beam.
- Possible to make a lighting up at middle or long distance.
- Harmonized with any kind of beam.


Available to order the custom specifications for lamp capacity, operation type, and other special system on request.

GEX-4020H3LP3 (2kW)

Reflecting mirror outer diameter	400mm
Xenon lamp capacity	2000W
Lamp cooling method	Forced air cooling
Focus method	by hand
elevation turning operation method	Electric remote controller
Remote control power supply	AC100V 1φ 60Hz
remote controller consumption electricity	Approx.400VA
Lamp form	KXL-2000G
Conformity ballast	KCX-803E-1
Max. luminous intensity	65×10 ⁶ cd
Beam spread	Approx.1.5°
Elevation angle	Down 30° Up20°
Turning angle	Right & left each 170°
Elevation speed	Approx.1.5°/sec.
Turning speed	Approx.2°/sec.
Protection degree	IP45
Weight	Approx.300kg
Code No.	Special order product



GEX-4020H3LP3

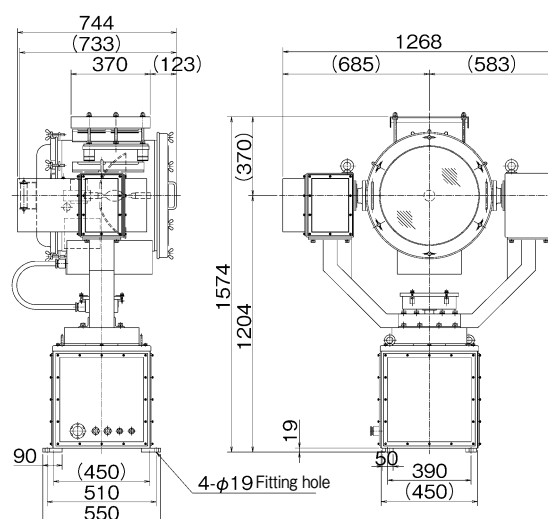

GEX-5045HLF (4.5kW)

Reflecting mirror outer diameter	500mm
Xenon lamp capacity	4500W
Lamp cooling method	Forced air cooling
Focus method	Electric remote controller
elevation turning operation method	Electric remote controller
Remote control power supply	AC200V 1φ 50/60Hz
remote controller consumption electricity	Approx.650VA
Lamp form	KXL-4500G
Conformity ballast	KCX-1203E-1
Max. luminous intensity	103×10 ⁶ cd
Beam spread	Approx.2°
Elevation angle	Down45° Up5°
Turning angle	Right & left each 170°
Elevation speed	0~3.3°/sec.
Turning speed	0~18°/sec.
Protection degree	IP45
Weight	Approx.240kg
Code No.	Special order product



GEX-5045HLF

